




**Production
Revolution**





About Us

Appliance Company brings together a huge assortment of components for the furniture sector.... The team studied all the stages of operation in order to reach the lowest cost of operation in the complementary and basic components sector in the furniture sector, through hub you can get the best assortment of the largest Egyptian and international companies that give you the opportunity in quantitative production and help solve production problems, and the increase in sales, as the engineering office chose the best types of components complementary to this important industry in terms of quality and price, as loading tests were carried out on all the components very carefully to obtain the desired purpose of the product at the lowest possible cost and the best quality.


You can also view the catalog of all components via **QR Code**



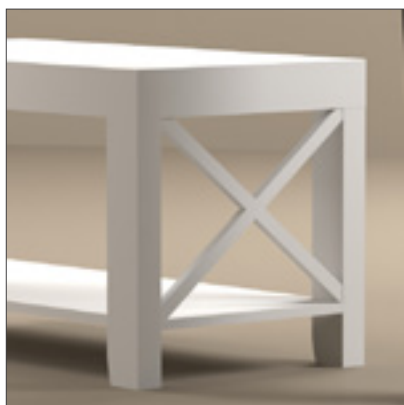

Wooden Cone Legs

أرجل خشبية مخروطية

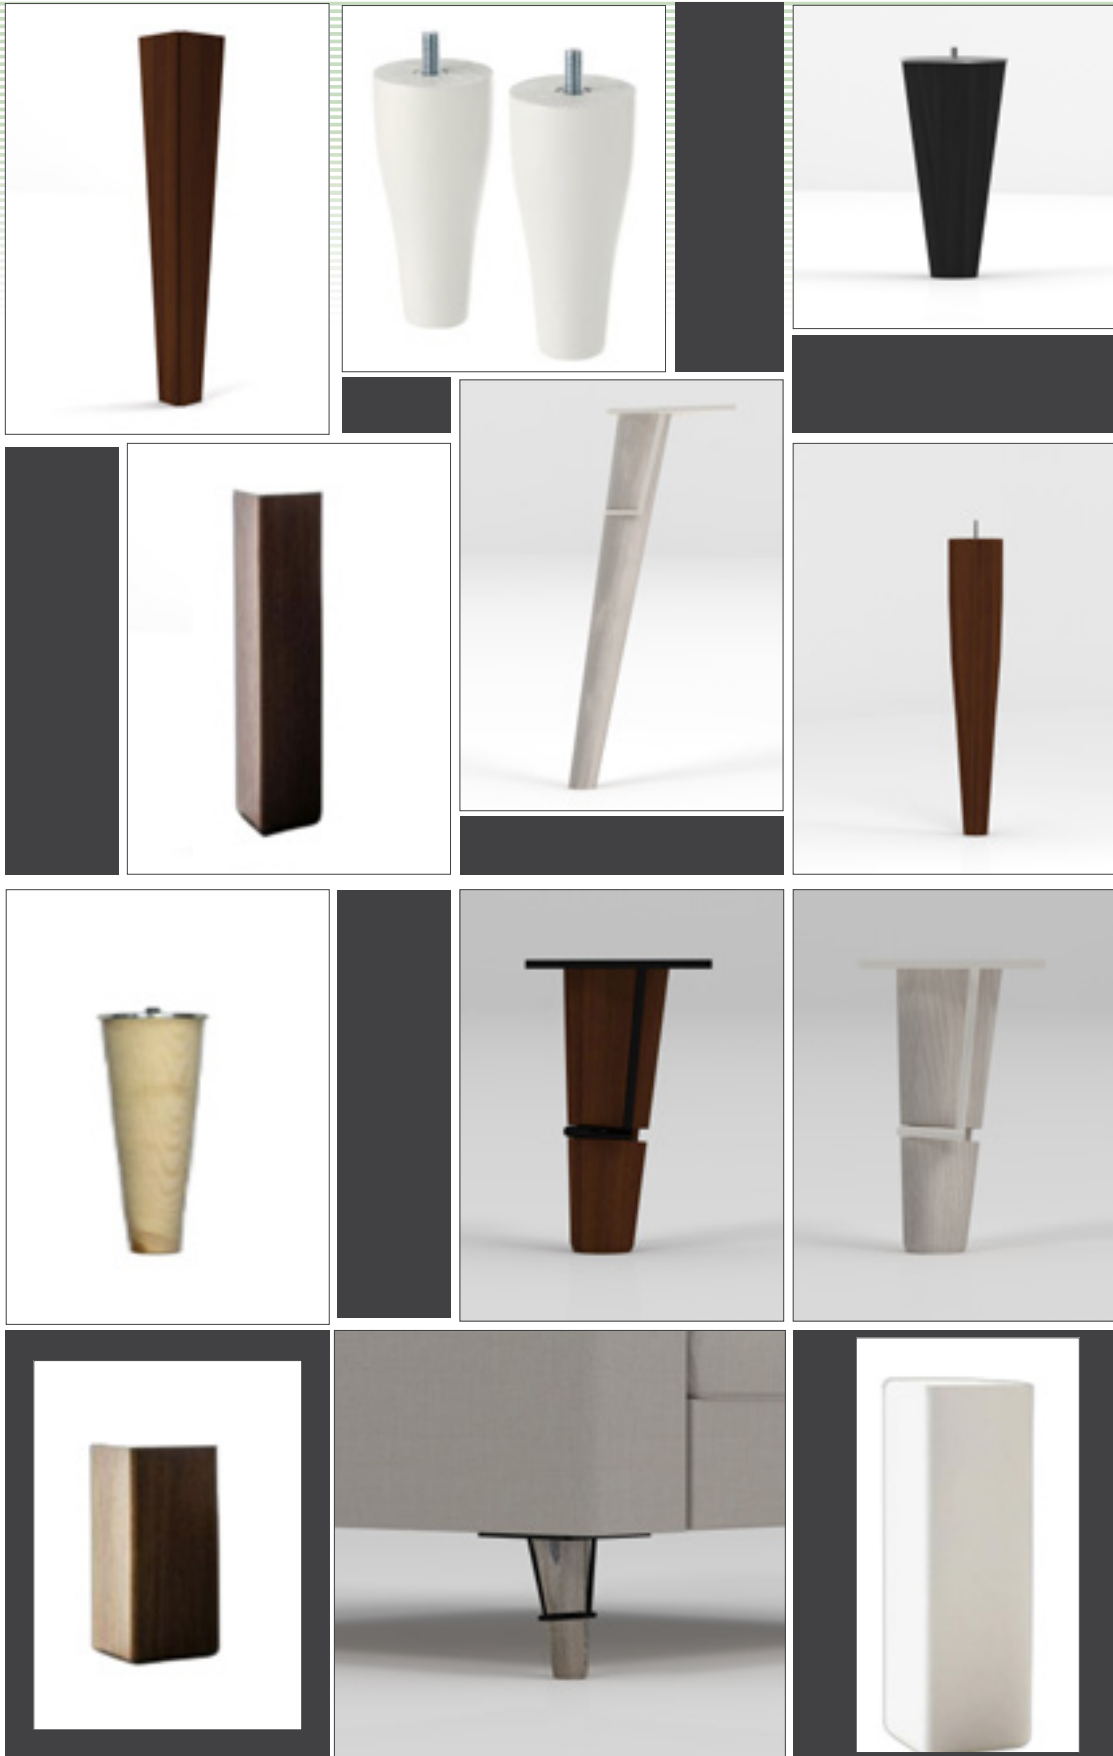

Bed headboard



ظهر سرير



Wooden Bed Board

ملة شريحة الخشب



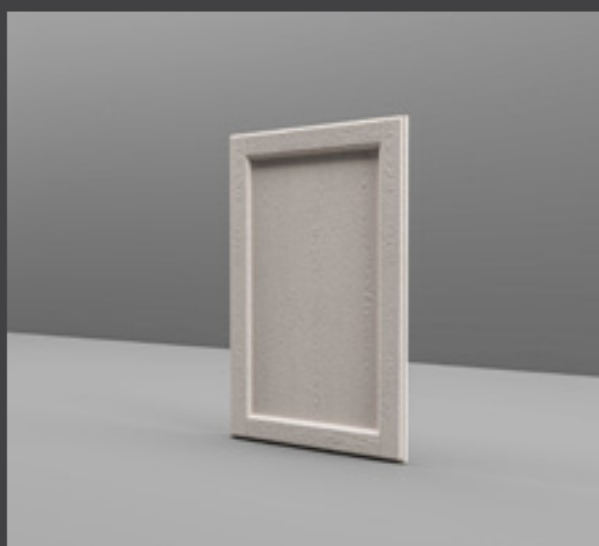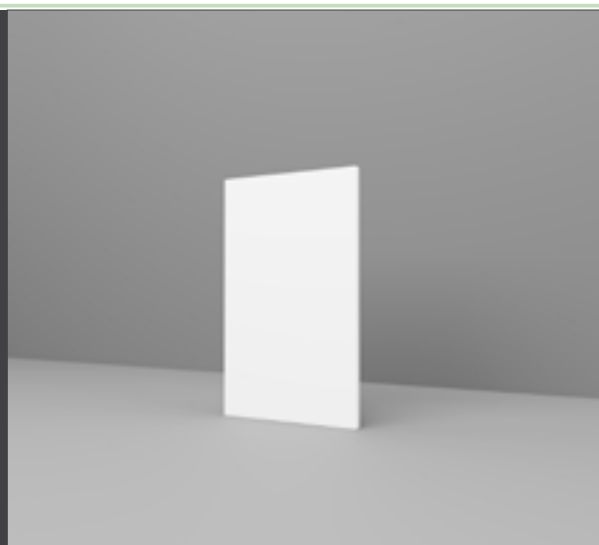


Wooden doors components

مكونات الأبواب الخشبية





Hollow core wooden doors



الواح مفرغة للأبواب

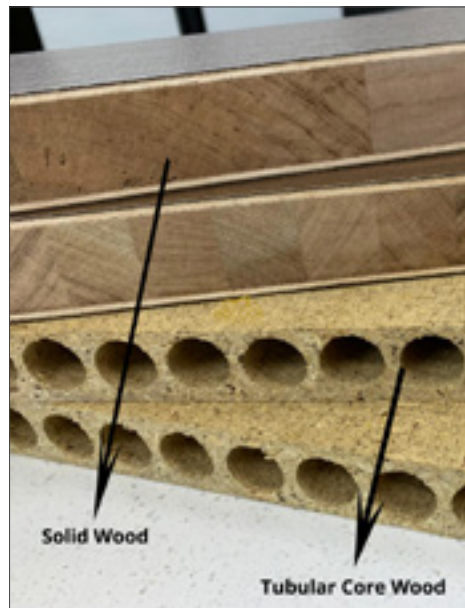



قطاع يوضح أبعاد الحلق

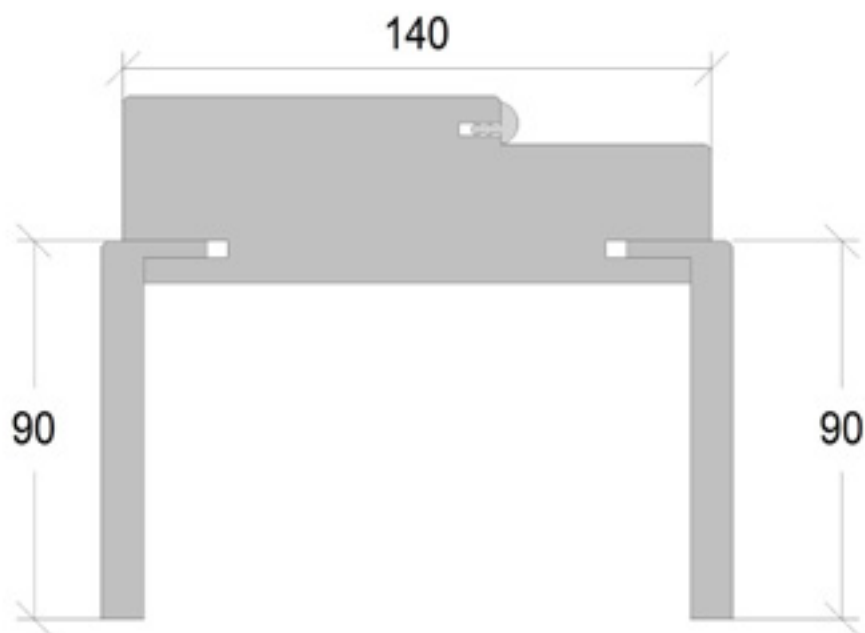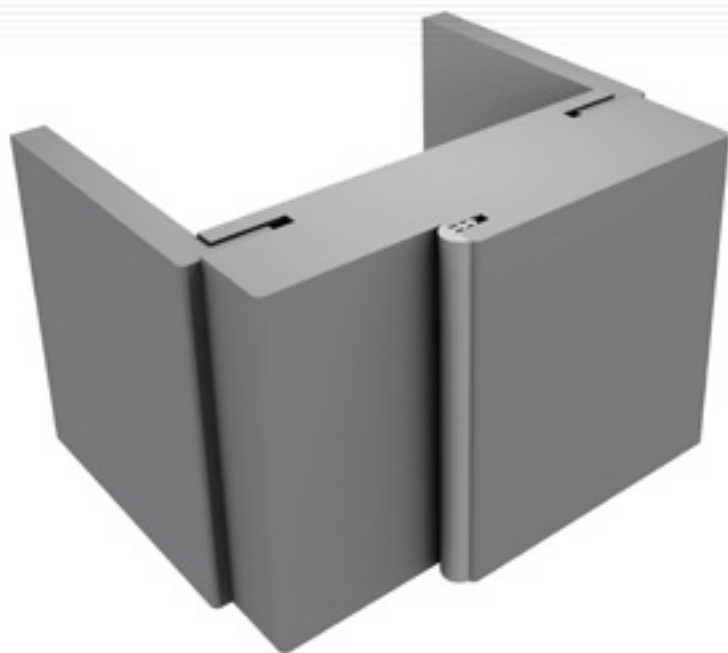

قطاع يوضح أبعاد البرور

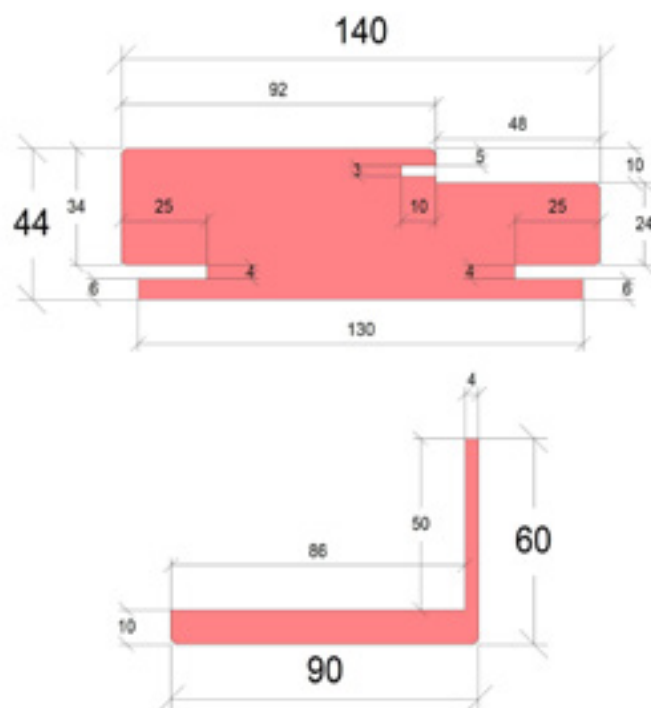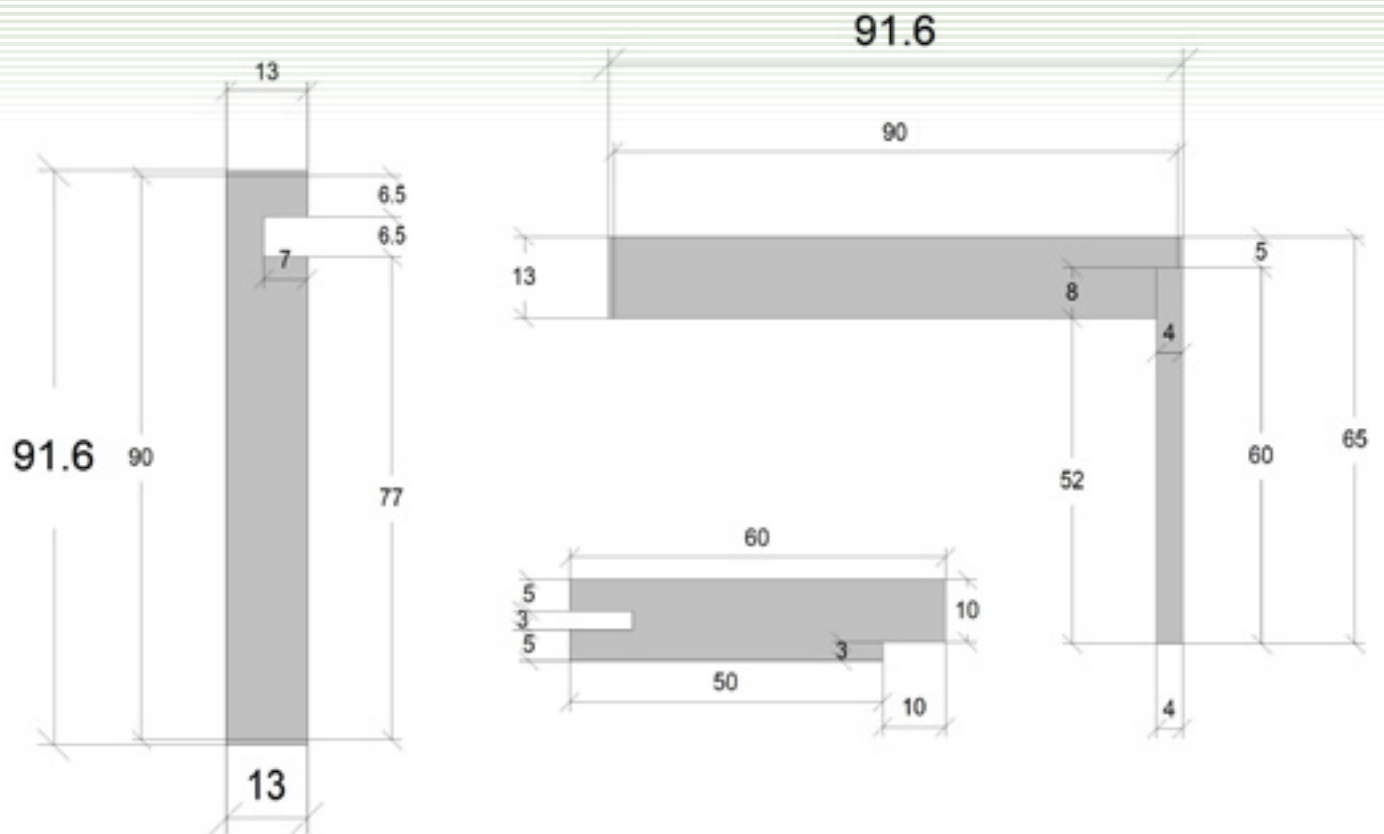

Laminate Door

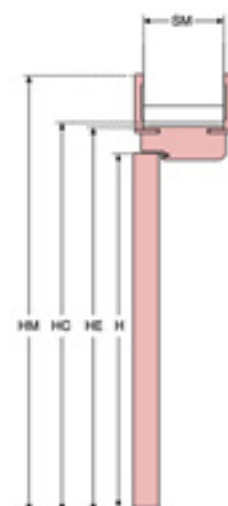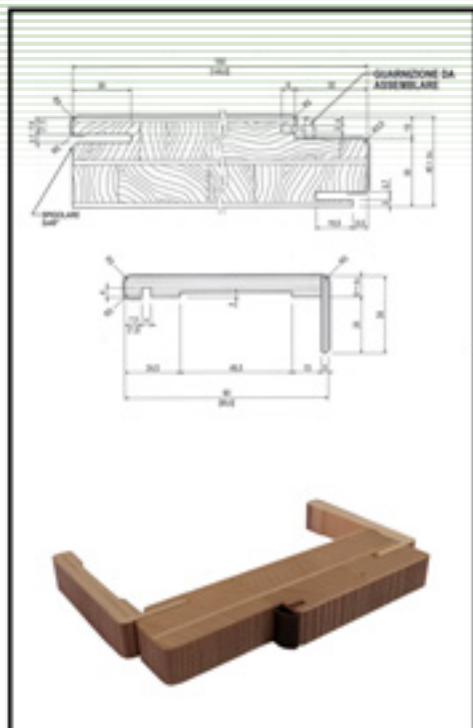

أبعاد فتحة الحائط
wall opening

LC / HC

800x2160

900x2160

1000x2160

عرض فتحة الباب
opening width

L

700

800

900

ارتفاع فتحة الباب
opening height

H

2100

تخانة الحائط
wall thickness

SM

80 - 140 - 300

أبعاد فتحة الحائط
wall opening

LE / HE

774x2147

874x2147

974x2147

أبعاد الأطار
subframe opening


LM / HM

924x2222


1024x2222

1124x2222

التركيب الداخلي للأبواب المولديد والأبواب الفلاش

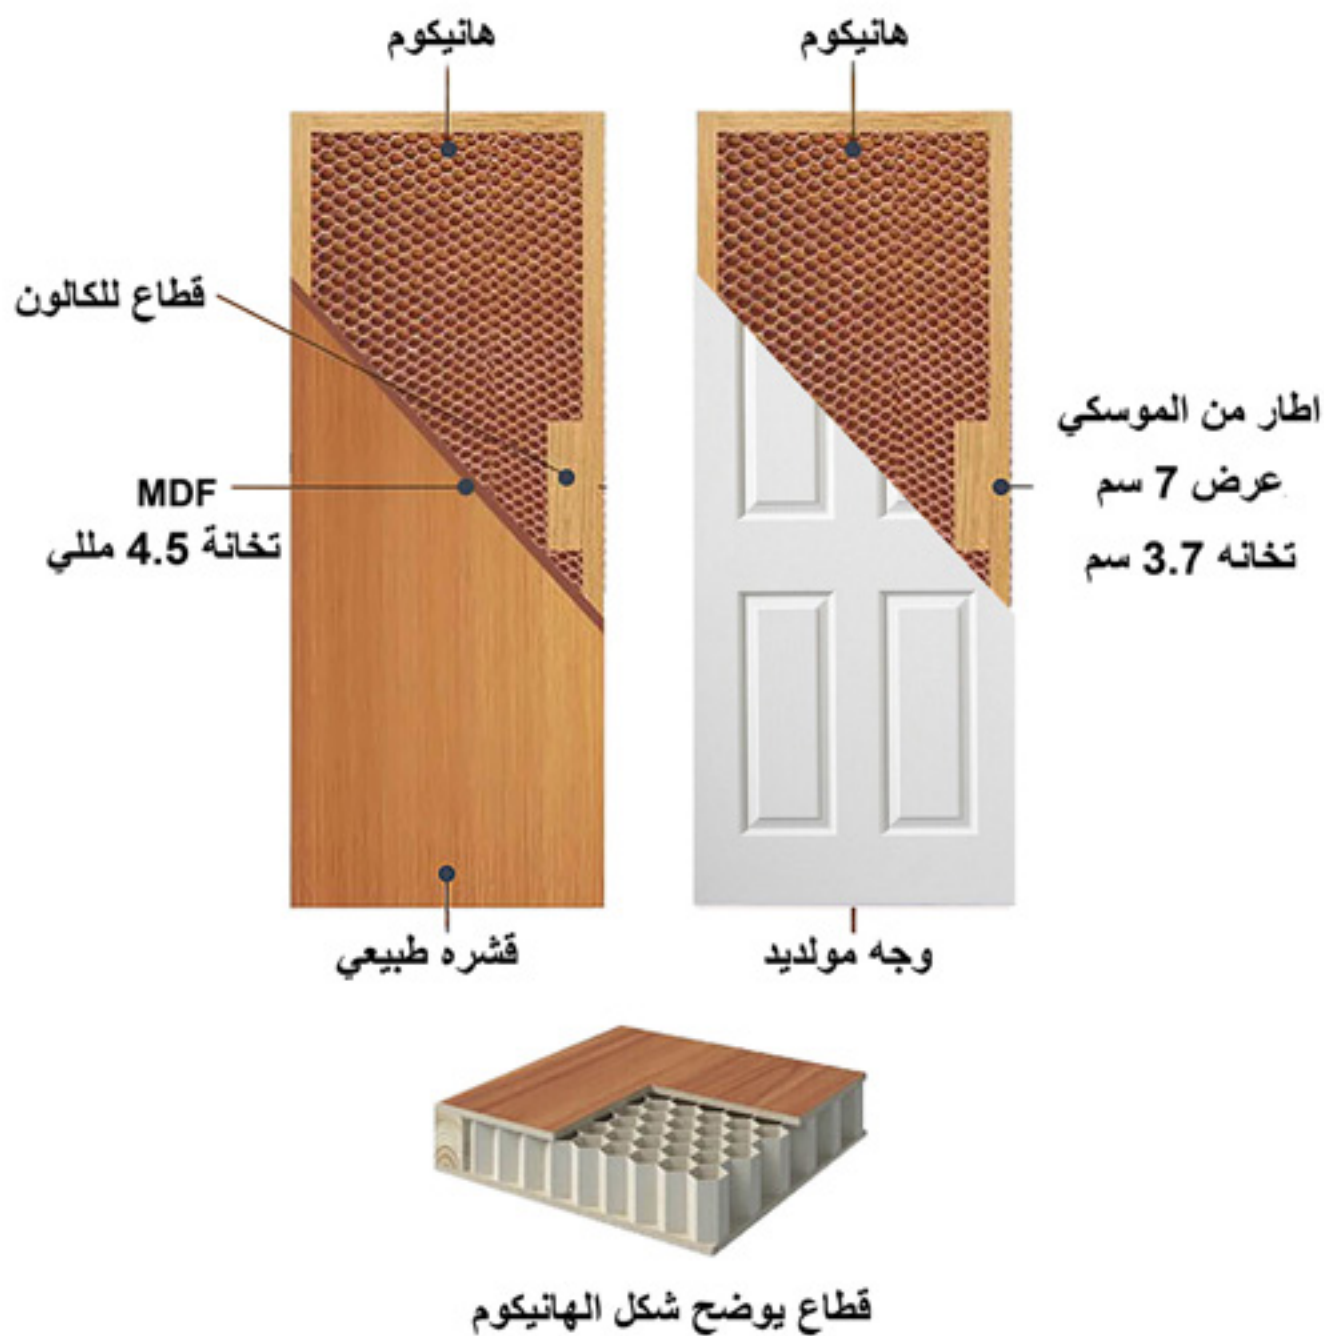

باب ثلاث حشوات

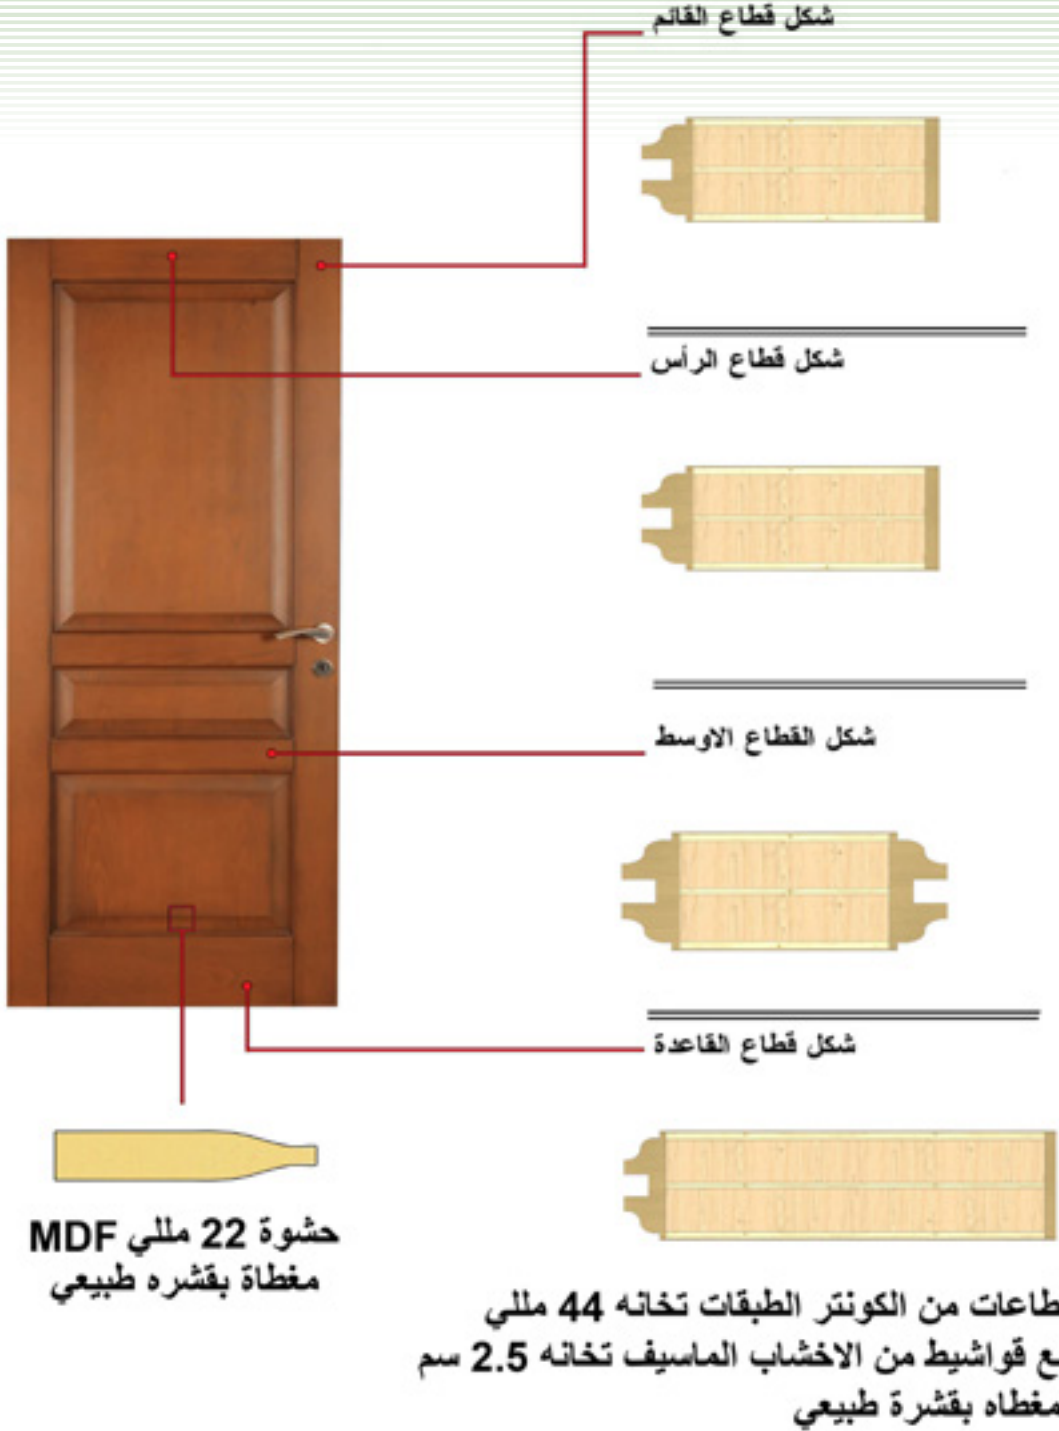

Frames & Architraves

حلوق و برور أبواب



F 001




F 002



F 003



F 004



F 005



A 001



A 002



A 003



Product Overview
Product Overview
Product Overview
Product Overview
Product Overview
Product Overview

HALSPAN®

Product Overview
Product Overview
Product Overview
Product Overview
Product Overview
Product Overview





Welcome

to one of the world's leading
suppliers of quality door components.

Established in the early 1990s, Halspan works tirelessly to ensure our doorsets are the safest and best you can possibly specify or use.

Halspan was also the first company to offer a full range of testing. We didn't just test one door to see whether it could be used as a Fire Door, we tested every conceivable door configuration and mode.

Since then we've stayed firmly at the forefront of our industry, continually exploring and developing new products to make our doorsets the safest – and best – you can specify.

Today, Halspan is one of the world's leading suppliers of quality doorset components – everything from the door itself, to seals and hardware.

You'll find Halspan doors in educational, healthcare, hospitality, industrial, commercial, residential, retail and Government buildings all over the world.



Non Fire Specification



Veria NFR 44mm Interior Grade

Maximum Supplied Door Sizes

2135 x 915 mm
2440 x 1220 mm

(Alternative sizes / thickness available on request)



Approved Frames

Timber –Hardwood
Timber – Softwood
MDF
Steel
Aluminium



Acoustic Value Rw



Single Doors

Unglazed 30dB / Rw

Approved Glazing Size (m²)

1.75m²



Durability

Service Life Testing

A Halspan Fire Door was subjected to **500,000** opening and closing cycles to simulate real life conditions in a busy hospital environment. The same door then went on to comfortably outperform a 30 minute fire resistance test. Our entire range, in fact, achieved the highest grading possible in the British Standard of Mechanical Tests for 'hinged or pivoted doors': **Severe Duty** - Subject to frequent or violent usage.

Tested in accordance with:

DD 171
EN 1191
EN 1192
EN 12217

Enhanced security performance requirements of door sets.
Tested to comply with PAS 23/24.

Weight (kg/m²)

25.52

U-Value(W/m²K) - Heat loss per m²

<2.00

The lower the u value, the better the insulation provided by the material

(Doorset = 2.0)

Formaldehyde Release Rating

Low (E1)



Veria Plus, NFR 44mm Interior Grade



Maximum Supplied Door Sizes

2135 x 915 mm
2440 x 1220 mm

(Alternative sizes / thickness available on request)

Approved Frames

Timber – Hardwood
Timber – Softwood
MDF
Steel
Aluminium



Acoustic Value Rw



Single Doors

Unglazed 30dB / Rw

Approved Glazing Size (m²)

1.75m²



Durability

Service Life Testing

A Halspan Fire Door was subjected to **500,000** opening and closing cycles to simulate real life conditions in a busy hospital environment. The same door then went on to comfortably outperform a 30 minute fire resistance test. Our entire range, in fact, achieved the highest grading possible in the British Standard of Mechanical Tests for 'hinged or pivoted doors': **Severe Duty** - Subject to frequent or violent usage.

Tested in accordance with:

DD 171
EN 1191
EN 1192
EN 12217

Enhanced security performance requirements of door sets.

Tested to comply with PAS 23/24.

Weight (kg/m²)

25.52


U-Value(W/m²K) - Heat loss per m²

<2.00

The lower the u value, the better the insulation provided by the material

(Doorset = 2.0)

No Added Formaldehyde

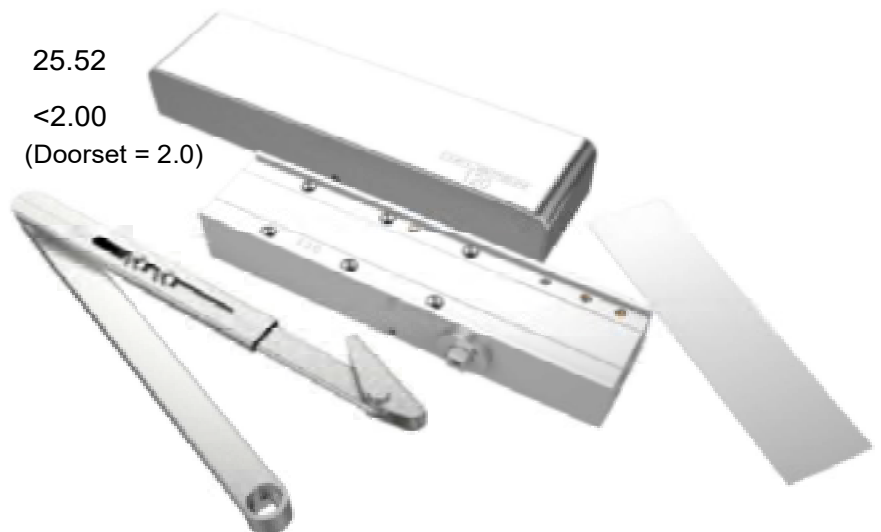

Optima 44mm Interior Grade



BS 476 Part 22



Fire Rating FD30



Maximum Approved Door Sizes

Single Doors	2135 x 1200mm
	2800 x 915mm
Double Doors	2135 x 1100mm
	2650 x 910mm

Approved Frames

Timber –Hardwood
Timber – Softwood
MDF
Steel
Aluminium



Acoustic Value Rw



Single Doors	Unglazed	33dB / Rw
	Glazed	35dB / Rw
Double Doors	Unglazed	32dB / Rw
	Glazed	35dB / Rw



Approved Glazing Size (m²) 1.75m²

Durability

Service Life Testing

A Halspan Fire Door was subjected to **1,000,000** opening and closing cycles to simulate real life conditions in a busy hospital environment. The same door then went on to comfortably outperform a 30 minute fire resistance test. Our entire range, in fact, achieved the highest grading possible in the British Standard of Mechanical Tests for 'hinged or pivoted doors': **Severe Duty** - Subject to frequent or violent usage.

Tested in accordance with:

DD 171
EN 1191
EN 1192
EN 12217

Enhanced security performance requirements of door sets.

Tested to comply with PAS 23/24.

Weight (kg/m ²)	27.3
U-Value(W/m ² K) - Heat loss per m ²	2.1
The lower the u value, the better the insulation provided by the material	(Doorset = 2.0)
Formaldehyde Release Rating	Low (E1)



Optima 54mm Interior Grade



BS 476 Part 22



Fire Rating FD60



Maximum Approved Door Sizes

Single Doors	2441 x 1384mm
	3050 x 825mm
Double Doors	2300 x 1142mm
	2850 x 825mm

Approved Frames

Timber –Hardwood
MDF



Acoustic Value Rw



Single Doors	Unglazed	34dB / Rw
	Glazed	35dB / Rw
Double Doors	Unglazed	33dB / Rw
	Glazed	35 dB / Rw



Approved Glazing Size (m²) 0.82m²

Durability

Service Life Testing

A Halspan Fire Door was subjected to **1,000,000** opening and closing cycles to simulate real life conditions in a busy hospital environment. Our entire range, in fact, achieved the highest grading possible in the British Standard of Mechanical Tests for 'hinged or pivoted doors': **Severe Duty** - Subject to frequent or violent usage.

Tested in accordance with:

DD 171
EN 1191
EN 1192
EN 12217

Enhanced security performance requirements of door sets.
Tested to comply with PAS 23/24.

Weight (kg/m²)	33.5
U-Value(W/m²K) - Heat loss per m²	1.8
The lower the u value, the better the insulation provided by the material	
Formaldehyde Release Rating	Low (E1)

(Doorset = 1.8)



Halspan 90 64mm Interior Grade



BS 476 Part 22



Fire Rating FD90



Maximum Approved Door Sizes

Single Doors	2400 x 1072mm
	2450 x 1047mm
Double Doors	2150 x 940mm
	2200 x 915mm

Approved Frames

Timber –Hardwood
Steel



Acoustic Value Rw



Single Doors	Unglazed	34dB / Rw
	Glazed	35dB / Rw
Double Doors	Unglazed	33dB / Rw
	Glazed	35dB / Rw



Approved Glazing Size (m²) 0.56m²

Weight (kg/m²) 40.3
Formaldehyde Release Rating Low (E1)



Halspan FD90 Lift Off Hinge + Intumescent Pads



ProTech 44mm Interior Grade - MDF or Ply Faced Exterior - Ply Faced Softwood Solid Timber Core



BS 476 Part 22



Fire Rating FD30



Maximum Approved Door Sizes

Single Doors	2130 x 1040mm
	2590 x 915mm
Double Doors	2440 x 940mm
	2490 x 915mm

Approved Frames

Timber –Hardwood
Timber – Softwood



Acoustic Value Rw



Single Doors	Unglazed	33dB / Rw (Ply) – 34dB / Rw (MDF)
	Glazed	34dB / Rw (Ply) – 36dB / Rw (MDF)
Double Doors	Unglazed	33dB / Rw (Ply)
	Glazed	33Db / Rw (Ply)

Approved Glazing Size (m²) 1.08m²

PAS 24: 2012 - Product Assessment Specification

PAS 24 is an enhanced security standard that can assess whether a doorset can withstand a series of measured manual and mechanical tests to deter the opportunistic intruder.

Halspan ProTech Doorsets have completed the extensive range of physical tests outlined in **PAS 24: 2012**.

The testing programme includes the following:

- Manual Manipulation
- Mechanical Loading
- Hard/Soft Body Impact
- Manual Cutting
- Hardware and Cylinder Security

Weight (kg/m²) 19.8

U-Value(W/m²K) - Heat loss per m² 1.9

The lower the u value, the better the insulation provided by the material
(Doorset = 1.8)



Prima Plus ENH 54mm Interior Grade



BS 476 Part 22



Fire Rating FD60



Maximum Approved Door Sizes

Single Doors 2438 x 1219mm

Double Doors 2438 x 1219mm

Approved Frames

Timber –Hardwood

MDF



Approved Glazing Size (m²)

0.50m²

Acoustic Value Rw



Single Doors

Unglazed

34dB / Rw

Weight (kg/m²)

34

U-Value(W/m²K) - Heat loss per m²


1.8

The lower the u value, the better the insulation provided by the material

(Doorset = 1.8)

Formaldehyde Release Rating

Low (E1)

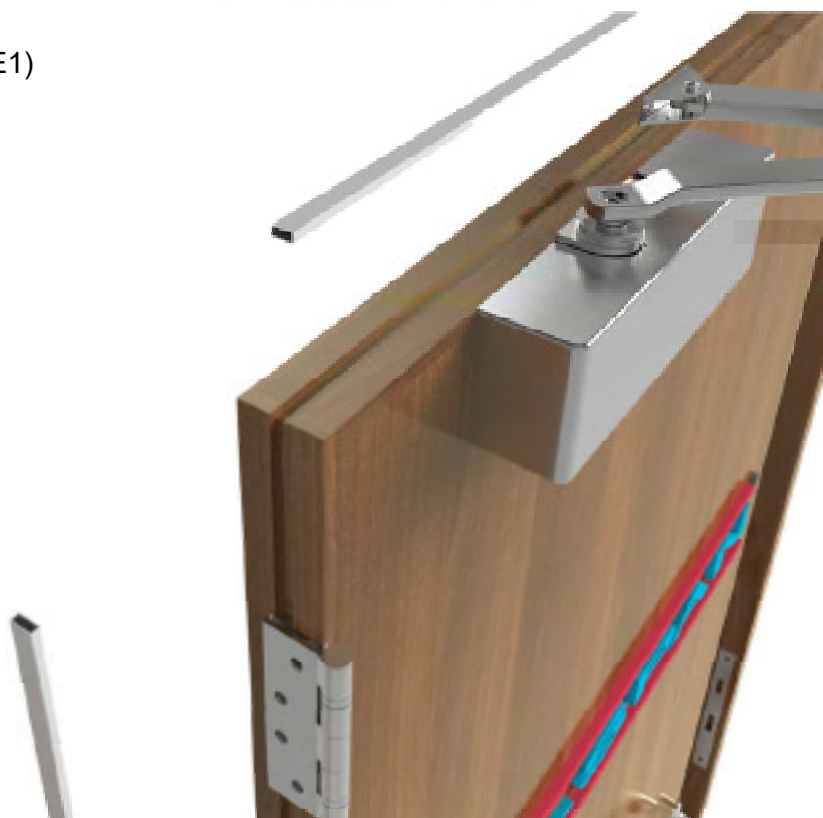

Optima 44mm Interior Grade



UL10c



The mark of responsible forestry

Fire Rating FD20



Maximum Approved Door Sizes

Single Doors 2438 x 1219mm

Double Doors 2438 x 1219mm

Approved Frames

Timber –Hardwood

Steel

Composite



Weight (kg/m²)

27.3

U-Value(W/m²K) - Heat loss per m²

2.1

The lower the u value, the better the insulation provided by the material

(Doorset = 2.0)

Formaldehyde Release Rating

Low (E1)




Halspan Door Components



Halspan 45 Interior Grade



UL10c



Maximum Approved Door Sizes

Fire Rating 45 Minutes



Single Doors 2743 x 1219mm

Double Doors 2743 x 1219mm

Fire Rating 60 Minutes



Single Doors 2743 x 1219mm


Double Doors 2743 x 1219mm

Fire Rating 90 Minutes



Single Doors 2743 x 1219mm

Double Doors 2743 x 1219mm

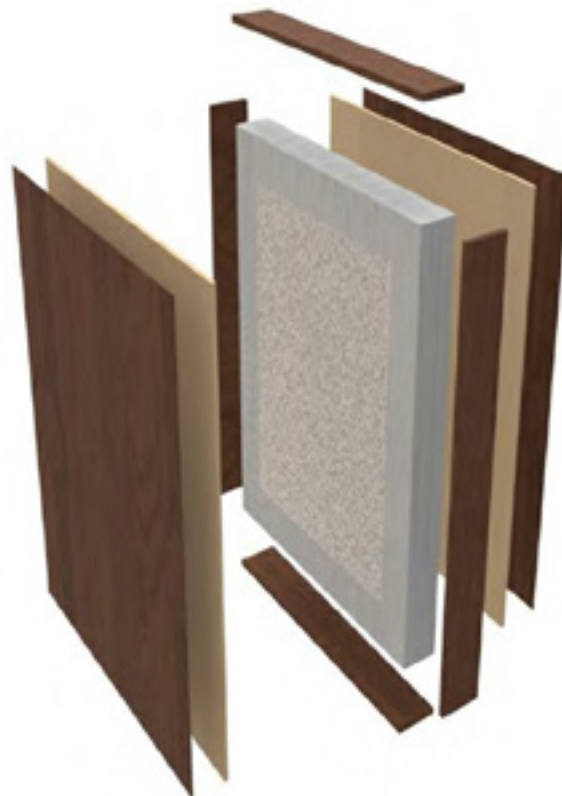

Approved Glazing Size (m²)

20 Minutes 2.067m²

45 Minutes 1.788m²

60 Minutes 1.788m²

90 Minutes 0.836m²

Weight (kg/m²) 23.45*

* Based on standard configuration category "A" banded core
at 38mm thick without Crossbands at a door leaf size of 2135 x 915 mm





Halspan Ltd

Tel: +44 (0) 1506 827538

Fax: +44 (0) 1506 825996

Digital Solutions



About Us

Ahram Security Group



Ahram Security Group is the leading manufacturing company in the field of access solutions, locking systems and door accessories in Egypt. Being a locally trusted market leader and a strong brand with expanding regional and global footprint, we are continually committed to making each and every one of our customers know, that through us, safety is found.

With a rich history of 75 years of experience and an expanding portfolio of mechanical and digital products and solutions, ASG has been successfully securing millions of homes and businesses in Egypt and worldwide, with specific focus on residential, administrative and commercial sectors, touristic and educational entities, airports and high security establishments.

iTec



ITEC is an EU-based access control solutions provider aiming to become a leading player in the global mechatronic access control market.

With design, production and development departments, ITEC was developed to create specific solutions for different needs and is innovatively adapting a range of access control with all the security guarantees that are required today.

By investing in the most advanced technologies, ITEC products are characterized by a refined identity, conferred by the combination of rigorous quality testing and manual processes that guarantee product perfection and innovation.

As an international group, with partnerships and offices established in various countries, ITEC is becoming a global brand with a solid footprint around the world.

Ahram By iTec



Ahram by iTEC is the ideal solution of combining the trusted manufacturing expertise of Ahram Security Group, and the mechatronic know-how of ITEC.


This collaboration offers the guarantee, installation and customization that Ahram Security Group offers, while using the design and technology of ITEC.



Iconography

 SSS	Stainless Steel	 Opening by Emergency Key	 Automatic Locking
 ABS	ABS Plastic	 AAA Batteries	 Anti-Card Function
 MTL	Metal	 AA Batteries	 Bluetooth
 ZZA	Zinc Alloy	 Conformity to European Standards	 European Cylinder
 GLS	Glass	 Underwriters Laboratory Certification	 USB Cable Power Supply
 RFID Opening		 Federal Communications Commission	 5 Keys
 Opening by Code		 Restriction of Hazardous Substances	 Master Key
 Fingerprint Opening		 Degree of IP Protection	 Keyed Alike
 Opening by Bluetooth		 Works in Standalone Mode	 Charger
 Opening by Command		 Antipanic Function	
 Identification Document Reader		 Do not Disturb Function	



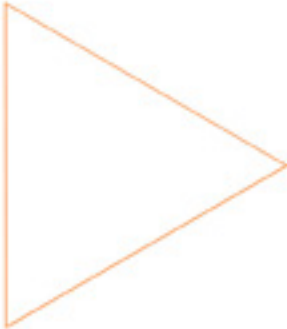

iClassic Series



The iClassic Series is designed for the hospitality industry and community buildings. Its elegant and compact design represents the ultimate balance between technology and practicality.



iClassic Series



Classic®


Recognized for its reliability, iClassic® is a lock that opens through proximity technology. iClassic® is completely wireless, consumes low energy, and can be configured through our software.



Technical Specifications

MATERIAL	STAINLESS STEEL 304
TECHNOLOGY	MIFARE® (CLASSIC ISO/IEC 14443-4)
OPENING METHOD	PROXIMITY
EMERGENCY OPEN	MECHANICAL KEY
POWER	DC 6V (AA*4)
BATTERY LIFETIME	~12 MONTHS
LEDS	GREEN AND RED
LOW BATTERY ALARM	3 LONG TICK BEFORE OPERATION
DRIVING CONSUMPTION	350MA
OPEN TIME	7S
NUMBER OF OPENINGS	~5000 OPENINGS (1YEAR)
SOFTWARE	(SFT01/ITEC ACCESS)
IP	IP 54 (IP65 BY REQUEST)
READING DISTANCE	≤ 55MM
RECOGNITION	0.5S

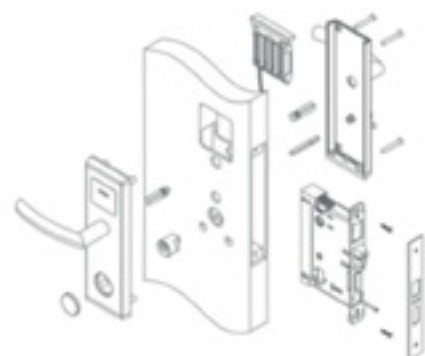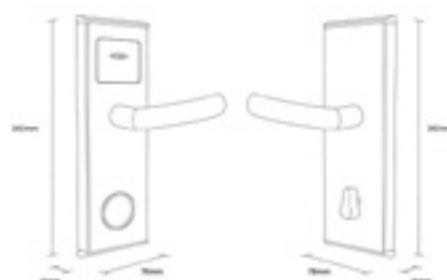

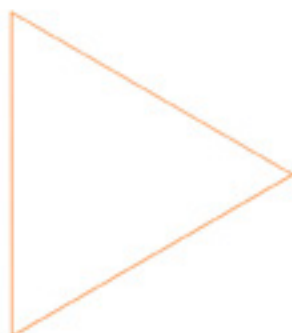

iCode Series



The iCode Series is controlled by a mobile application, MiFare or FOB cards, and is available with or without software. The iCode Series can be opened with a mechanical key for emergency, and includes an emergency power port under the cylinder cover. Despite its apparent simplicity, the iCode Series entertains complex locking situations to fit your needs and lifestyle.



iCode Series


iCode 03

Recognized for its simplistic design, elegance and ease of operation, iCode 03 ® is a lock that opens through pin code or Mifare Card, and is adaptable to any kind of lock.



Technical Specifications

MATERIAL	STAINLESS STEEL 304
OPENING METHOD	PIN CODE OR MIFARE® (CLASSIC ISO/IEC 14443-4)
EMERGENCY OPEN	MECHANICAL KEY
POWER	DC 6V (AAA*4)
BATTERY LIFETIME	~12 MONTHS
LEDS	WHITE
LOW BATTERY ALARM	3 LONG TICK BEFORE OPERATION
DRIVING CONSUMPTION	< 200 MA
OPEN TIME	1.5 S
NUMBER OF OPENINGS	~5000 OPENINGS (1YEAR)
STAND ALONE	YES
IP	IP65

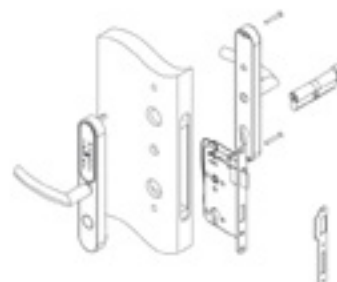



iSoftware Series

SFT-01

Access Control Software

The SFT 01 is an application of modern management interface, intuitive and extremely safe, designed to manage all functions related to access control. Allows creation of numerous types of access cards to be achieved the highest quality and safety in your services. Since the Master-Card, which allows you to open your entire chain of accommodations, to the limited simple opening of the lock by a number of uses.



Ideal for hotels, dorms, hostels, airports, clinics, hospitals, pharmacies, universities, schools, banks, administrative buildings, offices, governmental authorities, malls, homes...



Sicuro™

www.sicuro-eg.com



PRODUCTS



QURVA



SHARK



FIOCCA



ALEXIA



ALLEGRA



CONTE



YORK



DUBAI



BELLE



CADDY



ONDA



SHELBY



ALICE



DIAMOND



SERY



CLEO



ONE



PITAGORA



GIRO

NEW



YORK



SHARK






YORK






SHARK

SHARK






- Satin Chrome
- Satin Nickle
- Bright Chrome
- Antique Nickel
- Satin Gold
- Antique Bronze
- Black

ALLEGRA







- Bright Chrome
- Satin Chrome
- Satin Nickle
- Satin Gold
- Satin Antique Gold

BELLE





- | | |
|------------------|------------------|
| ● Satin Chrome | ● Antique Bronze |
| ● Satin Nickle | ● Satin Antique |
| ● Bright Chrome | ● Antique Nickel |
| ● Bright Gold | ● Black |
| ● Satin Gold | ● Rose Gold |
| ● Antique Bronze | |

ONDA



- | | |
|------------------|----------------|
| ● Bright Chrome | ● Antique Gold |
| ● Bright Gold | ● Black |
| ● Antique Bronze | |
| ● Satin Gold | |
| ● Rose Gold | |
| ● Satin Nickle | |



SERY

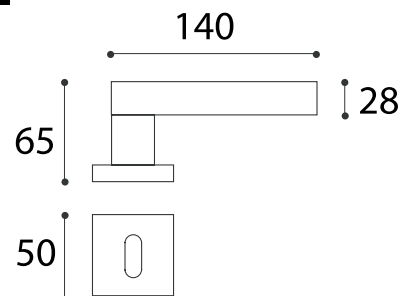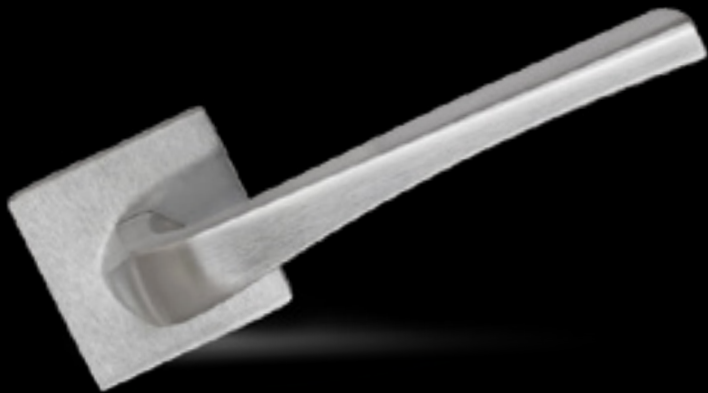

● Satin Nickel

● Satin Gold

SHARK



● Satin Chrome

● Black

● Satin Nickel

● Rose Gold

● Bright Chrome

● Bright Gold

● Satin Gold

● Antique Bronze

afm

NEW GENERATION

from **AHRAM**
Security Group



Conforms to the Egyptian Standards: 5700/2017


16614
HOTLINE

HANDLE

MODEL: STEP

AFM Door Handle with Long Backplate

TECHNICAL DRAWINGS

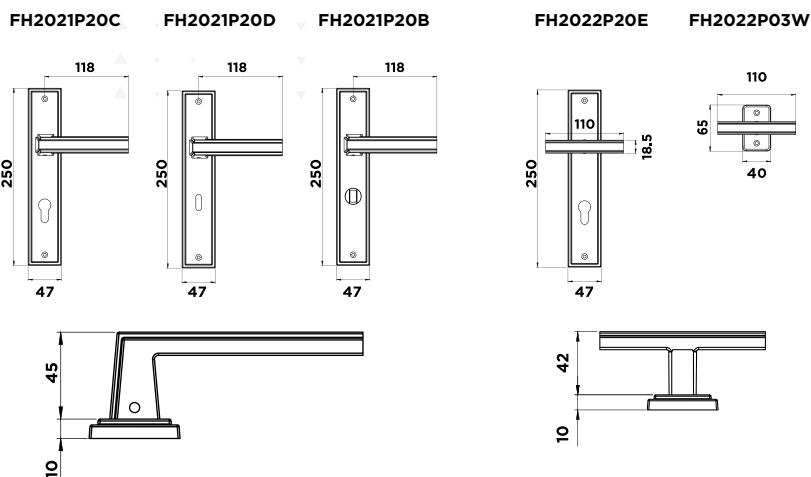

SPECIFICATIONS

Product Code	Drawing Code	Handle Functionality	Backplate Type	Center Distance
FH2021	FH2021P20C	Cylinder	Long	85 mm
FH2021	FH2021P20D	Internal	Long	72.5 mm
FH2021	FH2021P20B	Bathroom	Long	72.5 mm
FH2022	FH2022P20E	External	Long	85 mm
FH2022	FH2022P03W	Window	-	-

FINISHES



Nickel Matt



Bright Nickel



Gold



Antique Bronze




Antique Copper

Cylinder	FH2021P20CN203	FH2022P20CN101	FH2021P20CG101	FH2021P20CA101	FH2021P20CA401
Internal	FH2021P20DN203	FH2021P20DN101	FH2021P20DG101	FH2021P20DA101	FH2021P20DA401
Bathroom	FH2021P20BN203	FH2021P20BN101	FH2021P20BG101	FH2021P20BA101	FH2021P20BA401
External	FH2022P20EN203	FH2022P20EN101	FH2022P20EG101	FH2022P20EA101	FH2022P20EA401
Window	FH2022P03WN203	FH2022P03WN101	FH2022P03WG101	FH2022P03WA101	FH2022P03WA401


DURABILITY HIGHLIGHTS



100,000 cycles



Entrance Doors



Interior Doors



Bathroom Doors



USAGE APPLICATIONS

afm

MORTISE LOCK

Model: MI-31

Mortise Internal Lock with Ball
Bearing ,40 X 72 mm, Double Throws



NEW GENERATION


from **AHRAM**
Security Group

MORTISE LOCK

MODEL: MI-31



TECHNICAL DRAWINGS

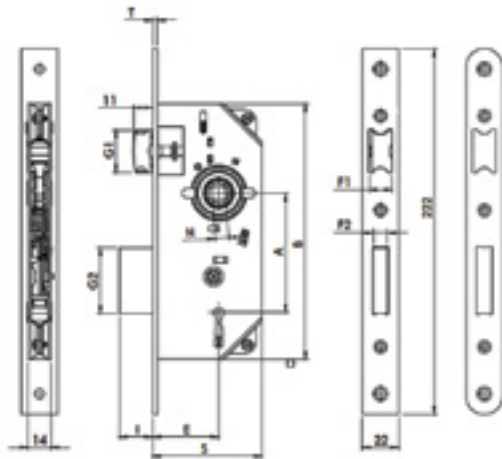

SPECIFICATIONS

ENG. CODE: WPMMIS011

Center Distance	Backset	Bearings	Hub Size	Hub Material	Latchbolt Type	Latchbolt Material	Deadbolt Type	Deadbolt Material	Reversible Latch	Throws	Keys
72 mm	40 mm	Yes	8 mm	Zamak	Standard	Zamak	Standard	Steel 40 mm	Yes	2	2

DEADBOLT AND LATCHBOLT FINISHES



Blue Galvanized



Yellow Galvanized




Blue Galvanized




Satin Brass

FACEPLATE FINISHES

DURABILITY HIGHLIGHTS




Deadbolt:
100,000 cycles



Latchbolt:
200,000 cycles

USAGE APPLICATIONS



**Interior
Doors**

afm

CYLINDERS

Model: CY-01

Euro Profile Cylinder, 5 Pins,
Keys at Both Ends.



NEW GENERATION


from **AHRAM**
Security Group

CYLINDERS

MODEL: CY-01



TECHNICAL DRAWINGS



SPECIFICATIONS

ENG. CODE: WPMCY003

ENG. CODE: WPMCY004

Cylinder Length	Profile Type	Body Material	Key	Key Material	Number Of Keys	Movable Detainers	Handle	Authorized Replacement	Master Key	α
61 mm	Euro Profile	Brass	Conventional	Brass	3	5	Available	Available	Available	0° or 35°
70 mm										

CYLINDER FINISH




Satin Nickel

DURABILITY HIGHLIGHTS




Cylinder:
100,000 cycles

USAGE APPLICATIONS



Entrance
Doors



Interior
Doors

afm

CYLINDERS

Model: CY-24

High Security Euro Profile Cylinder ,
(DK11) , 6 Pins , Outside Key / Inside
Knob.



NEW GENERATION


from **AHRAM**
Security Group

CYLINDERS

MODEL: CY-24



TECHNICAL DRAWINGS

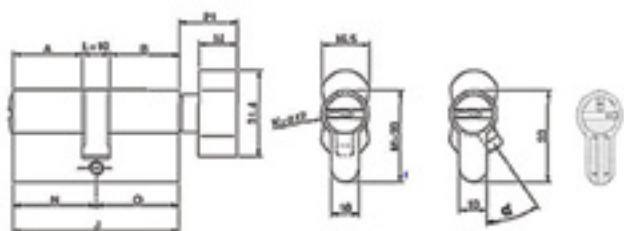

ENG. CODE: WPMCY246

ENG. CODE: WPMCY240

SPECIFICATIONS

ENG. CODE: WPMCY252

ENG. CODE: WPMCY156

ENG. CODE: WPMCY238

Cylinder Length	Profile Type	Body Material	Key	Key Material	Number Of Keys	Movable Detainers	Anti Drilling	Side detainers	Authorized Replacement	Master Key	α
70 mm	Euro Profile	Brass	Computer	Brass	5	6	Yes	4	Available	Available	0° or 35°
80 mm											
90 mm											

CYLINDER FINISH



Satin Nickel




Satin Chrome

DURABILITY HIGHLIGHTS




Cylinder:
100,000 cycles

USAGE APPLICATIONS



Entrance
Doors



Interior
Doors

afm

CYLINDERS

Model: CY-07

Oval Cylinder 54mm, 5 Pins.



NEW GENERATION


from **AHRAM**
Security Group

CYLINDERS

MODEL: CY-07



TECHNICAL DRAWINGS

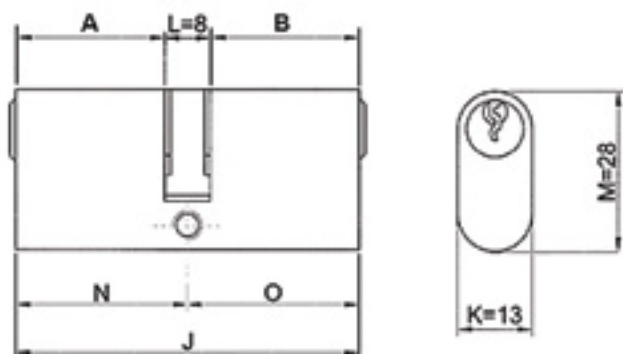

SPECIFICATIONS

Cylinder length	Profile Type	Body Material	Key	Key Material	Number Of Keys	Movable Detainers	Authorized Replacement
54 mm	Oval	Brass	Conventional	Brass	3	5	Available

CYLINDER FINISH




Satin Nickel

DURABILITY HIGHLIGHTS



Cylinder:
50,000 cycles

USAGE APPLICATIONS



Aluminium
Doors



Sicuro™



Farida El Benhawy

Business Development Manager

+201001716107

farida.elbenhawy@ahramsg.com



Sales Office:

31 Amin El-Kholy Street,
Ismailia Square,
Heliopolis, Cairo, Egypt.



Tel.: +202 22 412 121



Fax: +202 22 403 131



www.ahramsg.com



16614



FRESH PROJECTS



BUILT-IN
PRODUCTS

|  مكنونات إيطالية







SABAF
BURNERS

شعلات سباف و المدابس
إيطالية الصنع لضمان أفضل
تجربة للطهي



AIR
FRYER

الإير فراي
لطهي صحي بدون زيت في
عملية القلي و الشوي

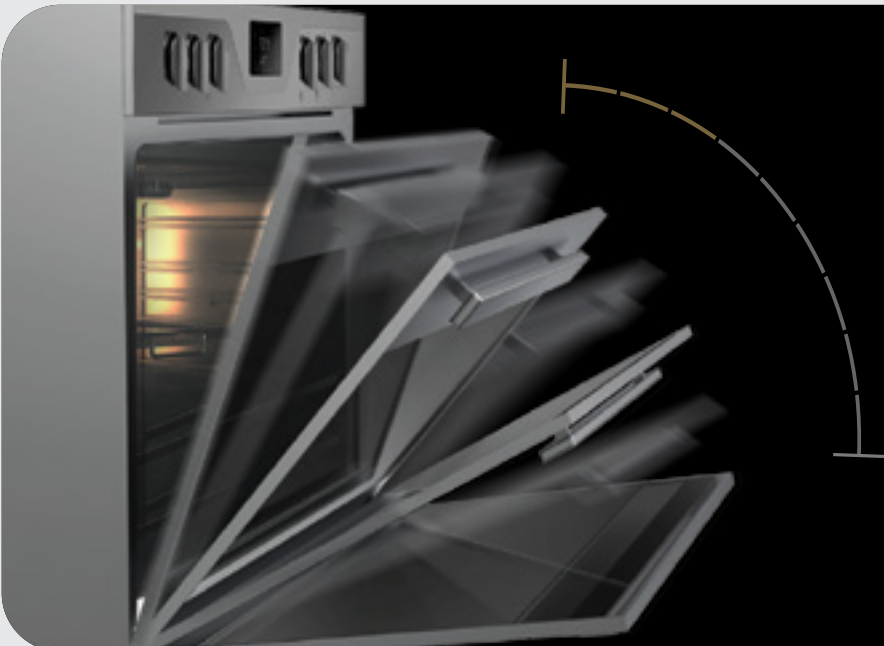

SOFT CLOSE
SYSTEM

مفصلات هايدروليك لباب الفرن
لسهولة فتح و إغلاق الباب

2 ZONE VTC HOB

I 500013942



المواصفات :

- لون البوتاجاز أسود
- عدد الشعلات ٢ شعلة كهرباء
- شعلات البوتاجاز إيطالية
- البوتاجاز مصنوع من زجاج سيراميك حرارى مقاوم لدرجات الحرارة العالية من إنتاج شركة Schott الألمانية العالمية
- مزود بلوحة تحكم أمامية
- يعمل بتقنية الإشعال الذاتي

6295 EGP

5 ZONE VTC HOB

I 500009863



المواصفات :

- مسطح بليت إن ٦٠*٩٠ سم
- لون البوتاجاز أسود
- عدد الشعلات ٥ شعلة كهرباء
- شعلات البوتاجاز إيطالية
- البوتاجاز مصنوع من زجاج سيراميك حرارى مقاوم لدرجات الحرارة العالية من إنتاج شركة Schott الألمانية العالمية
- إمكانية قفل لوحة التحكم باللمس لتوفير الأمان
- مزود بلوحة تحكم أمامية تعمل باللمس
- تقنية الاشعال الذاتي
- ٩ مستويات من الحرارة

28275 EGP

4 ZONE VTC HOB

I 500009861



المواصفات :

- مسطح بليت إن ٦٠*٦٠ سم
- لون البوتاجاز أسود
- عدد الشعلات ٤ شعلة كهرباء
- شعلات البوتاجاز إيطالية
- البوتاجاز مصنوع من زجاج سيراميك حرارى مقاوم لدرجات الحرارة العالية من إنتاج شركة Schott الألمانية العالمية
- إمكانية قفل لوحة التحكم باللمس لتوفير الأمان
- مزود بلوحة تحكم أمامية تعمل باللمس
- تقنية الاشعال الذاتي
- ٩ مستويات من الحرارة

16285 EGP

STAINLESS HOB

I 500008866



المواصفات :

- مسطح بليت إن ٦٠*٩٠ سم
- لون البوتاجاز استانلس استيل
- عدد الشعلات ٥ شعلة غاز
- شعلات البوتاجاز من ماركة سباف الايطالية
- البوتاجاز مصنوع من الاستانليس ستيل ٣٠٤ عالى الجودة
- يعمل بتقنية الاشعال الذاتي بالمفتاح
- مزود بحوامل اوانى معدن
- سطح استانلس ٣٠٤ مط
- محابس وعيون ايطالية و المحابس متدرجة للتحكم فى قوة مستوى الشعلة

9975 EGP

STAINLESS HOB

I 500009849



المواصفات :

- مسطح بليت إن ٦٠*٦٠ سم
- لون البوتاجاز استانليس استيل
- عدد الشعلات ٤ شعلة غاز
- شعلات البوتاجاز من ماركة سباف الايطالية
- البوتاجاز مصنوع من الاستانليس ستيل ٣٠٤ على الجودة
- مزود بلوحة تحكم امامية، سطح استانليس ٣٠٤ مط
- مزود بخاصية الامان ، مزود بحوامل اواني زهر
- يعمل بتقنية الاشعال الذاتي بالمفتاح
- محابس وعيون ايطالية و المحابس متدرجة للتحكم في قوة مستوى الشعلة

9010 EGP

STAINLESS HOB

I 500009614



المواصفات :

- مسطح بليت إن ٦٠*٦٠ سم
- لون البوتاجاز استانليس استيل
- عدد الشعلات ٤ شعلة غاز
- شعلات البوتاجاز من ماركة سباف الايطالية
- البوتاجاز مصنوع من الاستانليس ستيل ٣٠٤ على الجودة
- مزود بلوحة تحكم امامية
- يتم فصل البوتاجاز تلقائيا عند انطفاء النار
- مزود بحوامل اواني زهر، سطح استانليس ٣٠٤ مط
- محابس وعيون ايطالية و المحابس متدرجة للتحكم في قوة مستوى الشعلة

10620 EGP

STAINLESS HOB

I 500009659



المواصفات :

- مسطح بليت إن ٦٠*٩٠ سم
- لون البوتاجاز استانليس استيل
- عدد الشعلات ٥ شعلة غاز
- يتم فصل البوتاجاز تلقائيا عند انطفاء النار
- شعلات البوتاجاز من ماركة سباف الايطالية
- البوتاجاز مصنوع من الاستانليس ستيل ٣٠٤ على الجودة
- مزود بلوحة تحكم امامية
- يعمل بتقنية الاشعال الذاتي بالمفتاح
- مزود بحوامل اواني زهر
- سطح استانليس ٣٠٤ مط
- محابس وعيون ايطالية و المحابس متدرجة للتحكم في قوة مستوى الشعلة

11910 EGP

STAINLESS BUILT-IN OVEN

I 500010342



المواصفات :

- مقاس الفرن ٦٠ سم / سعة الفرن اللترية ٥٦ لتر
- لون الفرن استانلس ستيل / مزود بامان كامل
- مزود بمروحة لتبريد جسم الفرن
- مزود بمروحة تعمل على توزيع الحرارة داخل الفرن
- المحابس و العيون ايطالية كما تتميز المحابس بوجود تدرج
- لسهولة التحكم بمستوى النار
- يعمل بشعلة فرن غاز وشواية كهرباء
- شبك نيكل جانبي بباب هيدروليك لسهولة قفل باب الفرن
- اشعال اتوماتيك بالمفتاح مما يتيح لك سهولة اشعال النار
- باب الفرن سهل الفك و التركيب
- يتم فصل البوتاجاز تلقائياً عند انطفاء النار

17525 EGP

STAINLESS BUILT-IN OVEN

I 500009652



المواصفات :

- مقاس الفرن ٦٠ سم / سعة الفرن اللترية ٥٦ لتر
- الفرن استانلس ستيل
- مزود بمروحة لتبريد جسم الفرن
- المحابس و العيون ايطالية كما تتميز المحابس بوجود تدرج
- لسهولة التحكم بمستوى النار
- يعمل بشعلة فرن غاز وشواية غاز
- شبك نيكل جانبي بباب هيدروليك لسهولة قفل باب الفرن
- مقلاة هوائية داخلية للحصول على طعام صحي
- اشعال اتوماتيك بالمفتاح مما يتيح لك سهولة اشعال النار
- باب الفرن سهل الفك و التركيب
- يتم فصل البوتاجاز تلقائياً عند انطفاء النار

19085 EGP

BLACK BUILT-IN TOP OVEN

I 500009661



المواصفات :

- مقاس الفرن ٩٠ سم / سعة الفرن اللترية ١١٠ لتر
- لون الفرن : استانلس ستيل / مزود بامان كامل
- مزود بمروحة تعمل على توزيع الحرارة داخل الفرن
- مزود بمروحة لتبريد جسم الفرن
- المحابس والعيون ايطالية كما تتميز المحابس بوجود تدرج
- لسهولة التحكم بمستوى النار
- يعمل بشعلة فرن غاز وشواية كهربائية
- شبك نيكل جانبي ويتميز بباب هيدروليك لسهولة قفل باب الفرن
- مقلاة هوائية داخلية للحصول على طعام صحي
- متوفر بموديل تنظيف ذاتي للفرن كاتاليتك (اختياري)
- اشعال اتوماتيك بالمفتاح مما يتيح لك سهولة اشعال النار
- باب الفرن سهل الفك والتركيب
- يتم فصل البوتاجاز تلقائياً عند انطفاء النار

26700 EGP

BLACK BUILT-IN OVEN

I 500010345



المواصفات :

- مقاس الفرن ٦٠ سم / سعة الفرن اللترية ٥٦ لتر
- لون الفرن اسود / مزود بامان كامل
- مزود بمروحة لتبريد جسم الفرن
- مزود بمروحة تعمل على توزيع الحرارة داخل الفرن
- المحابس و العيون ايطالية كما تتميز المحابس بوجود تدرج
- لسهولة التحكم بمستوى النار
- يعمل بشعلة فرن غاز وشواية غاز
- شبك نيكل جانبي بباب هيدروليك لسهولة قفل باب الفرن
- اشعال اتوماتيك بالمفتاح مما يتيح لك سهولة اشعال النار
- باب الفرن سهل الفك و التركيب
- يتم فصل البوتاجاز تلقائياً عند انطفاء النار

18095 EGP



HOODS

STAINLESS BUILT-IN HOOD

I 500015907



المواصفات :

- مقاس الشفاط : ٩٠ سم
- عدد السرعات : ٣ سرعات
- قوة الشفط ٤٠٠ متر مكعب / ساعة
- مزود بعدد ٢ موتور
- مزود بعملية التحكم فى توجيه الهواء الامامى
- جسم خارجي من الالستائلس مقاوم للخدش
- مزود بعملية طرد الهواء مباشرة إلى الخارج وإعادةته إلى المكان عند تنقيته
- جهد التشغيل: ٢٢٠-٢٤٠ فولت
- التردد: ٥٠ هرتز
- ٣ فلتر من الالومنيوم المضاد للشحوم
- ٢ فلتر كربوني لتنقية الهواء من الزيوت
- إضاءة ليد لإضاءة ولرؤية أوضح
- مفتاح مصباح

6080 EGP

STAINLESS BUILT-IN HOOD

I 500015906



المواصفات :

- مقاس الشفاط : ٦٠ سم
- عدد السرعات : ٣ سرعات
- قوة الشفط ٤٠٠ متر مكعب / ساعة
- مزود بعدد ٢ موتور
- مزود بعملية التحكم فى توجيه الهواء الامامى
- جسم خارجي من الالستائلس مقاوم للخدش
- مزود بعملية طرد الهواء مباشرة إلى الخارج وإعادةته إلى المكان عند تنقيته
- جهد التشغيل: ٢٢٠-٢٤٠ فولت
- التردد: ٥٠ هرتز
- ٢ فلتر من الالومنيوم المضاد للشحوم
- ٢ فلتر كربوني لتنقية الهواء من الزيوت
- إضاءة ليد لإضاءة ولرؤية أوضح
- مفتاح مصباح

5455 EGP



FRESH PROJECTS

